

Features

- Single lever controls both volume and temperature settings. Diverter switches water flow between components.
- 2.5 GPM (9.5 LPM) maximum flow rate at 80 psi (5.50 bar).
- HAHN ceramic disc valves provide performance that is enduring for a lifetime and outlasts industry standards.
- Includes shower head, shower arm, hand shower, sidebar, hose, check valve, pressure balance valve & trim.
- Limited Warranty. Details available on website.

Materials


- Premium stainless steel construction for durability and reliability.
- HAHN finishes resist tarnishing and corrosion.

Installation

- Minimum of 4 1/2" x 6" (114mm x 152mm) oval hole for valve.
- Minimum of Ø 5/8" (16mm) diameter hole for shower arm.
- Minimum of Ø 5/8" (16mm) diameter hole for hand shower.

Available Colours/Finishes

| Color | Code | Description |
|---|------|-----------------|
|  | CR | Polished Chrome |
|  | BN | Brushed Nickel |
|  | MB | Matte Black |
|  | BB | Brushed Brass |

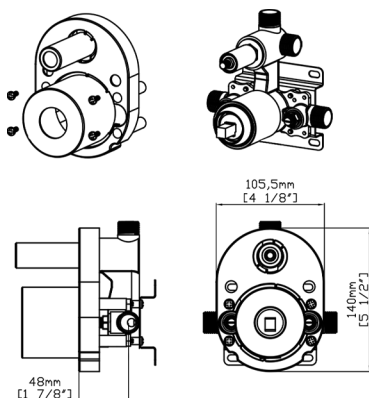

Codes & Standards

- Canadian Uniform Plumbing Code™ (cUPC) 
- ASME A112.18.1-2018/CSA B125.1-18 

