

Features

- Single lever controls both volume and temperature settings.
- 1.5 GPM (5.7 LPM) maximum flow rate at 60 psi (4.14 bar).
- 7 9/16" (193mm) spout length.
- HAHN ceramic disc valves provide performance that is enduring for a lifetime and outlasts industry standards.
- Includes pop-up drain.
- Limited Warranty. Details available on website.

Materials

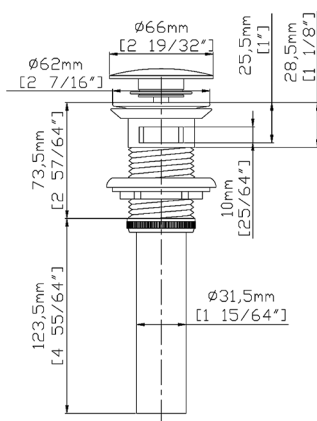
- Premium stainless steel construction for durability and reliability.
- HAHN finishes resist tarnishing and corrosion.

Installation



- Wall-mounted installation.
- Minimum of Ø1 3/8" (35mm) diameter holes.

Available Colours/Finishes

| Color | Code | Description |
|-------------------------------------------------------------------------------------|------|-----------------|
|  | CR | Polished Chrome |
|  | BN | Brushed Nickel |
|  | MB | Matte Black |
|  | BB | Brushed Brass |



Codes & Standards

- Canadian Uniform Plumbing Code™ (cUPC) 
- Lead Free Compliant (AB1953)
- American National Standard (NSF/ANSI 61) 
- ADA (Americans with Disabilities Act) 