

### Features

- Single lever controls both volume and temperature settings. Diverter switches water flow between components.
- 5.0 GPM (18.9 LPM) maximum flow rate at 45 psi (3 bar).
- HAHN ceramic disc valves provide performance that is enduring for a lifetime and outlasts industry standards.
- Includes trim, handle, valve, pressure balance cartridge, and mudguard.
- Available in 1/2" NPT, 1/2" PEX, and 1/2" PEX Expansion.
- Limited Warranty. Details available on website.

### Materials


- Premium stainless steel and brass construction for durability and reliability.
- HAHN finishes resist tarnishing and corrosion.

### Installation

- Minimum of 4 1/2" x 6" (114mm x 152.4mm) oval hole.

### Available Colours/Finishes

Color	Code	Description
	CR	Polished Chrome
	BN	Brushed Nickel
	MB	Matte Black
	BB	Brushed Brass

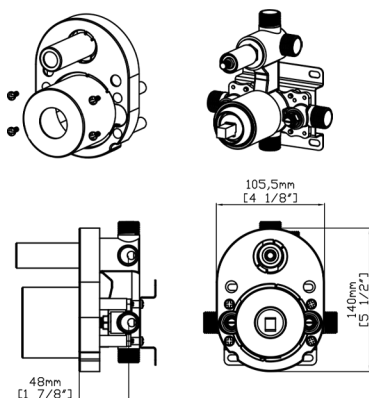

### Codes & Standards

- Canadian Uniform Plumbing Code™ (cUPC) 
- ASME A112.18.1-2018/CSA B125.1-18 

