



Wall-Mounted Bathroom Faucet Installation Manual

Tools Required



Hexagon Wrench



Philips Screwdriver



Plumber's Tape


Notes

1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (this includes a combination of hot and cold inlet lines).
4. Pictures in the manual are for general information and do not represent the purchased product.
5. If you plan on leaving your house vacant, please ensure to shut off the main water supply.


Daily Maintenance

1. Use a soft cloth with diluted vinegar to remove hard water stains.
2. Check the aerator for calcium build up if the water pressure is not optimum.
3. DO NOT use caustic cleaning products on the products as it will break down the finish and will void the warranty of the product.
4. Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.


Installation

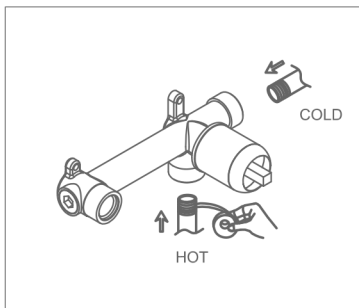


1. Use the plumbers tape around the water inlet pipes and then connect it to valve.

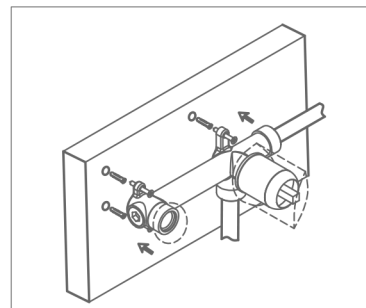


2. Fix the valve to a support brace in the wall.

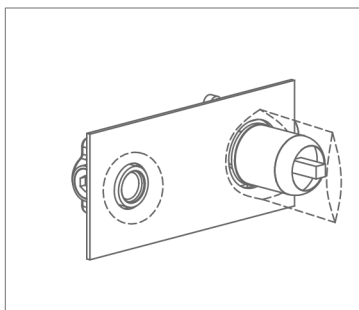


3. Drill the specified hole size in the wall for the spout and handle.

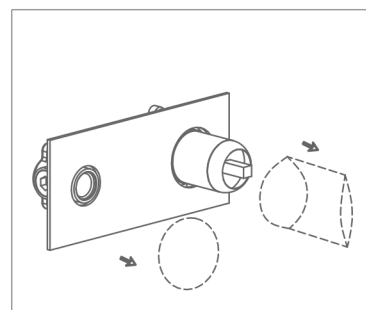

4. Install the cartridge for the handle.

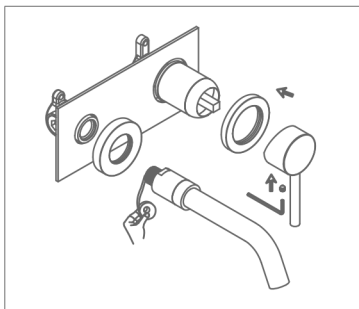

5. Slide the plates on for the spout and handle. Install the spout with plumbers tape. Then install the handle with the set screw and wrench.

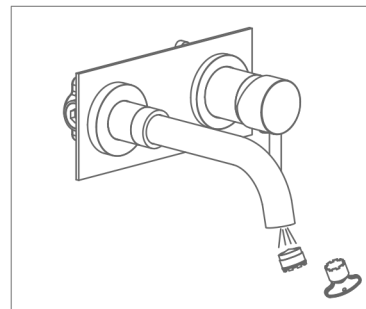

6. After installing the faucet, remove the aerator and turn the faucet on for one minute to flush the debris in the pipes. Install the aerator after flushing.