

## Features

- Single lever controls both volume and temperature settings. Diverter switches water flow between components.
- 2.5 GPM (9.5 LPM) maximum flow rate at 80 psi (5.50 bar).
- HAHN ceramic disc valves provide performance that is enduring for a lifetime and outlasts industry standards.
- Includes shower head, shower arm, hand shower, check valve, slidebar, hose, spout, pressure balance valve & trim.
- Limited Warranty. Details available on website.

## Materials


- Premium stainless steel construction for durability and reliability.
- HAHN finishes resist tarnishing and corrosion.

## Installation


- Minimum of 4 1/2" x 6" (114mm x 152mm) oval hole for valve.
- Minimum of Ø 5/8" (16mm) diameter hole for shower arm.
- Minimum of Ø 5/8" (16mm) diameter hole for hand shower.
- Minimum of Ø 5/8" (16mm) diameter hole for spout.

### Available Colours/Finishes

Color	Code	Description
	CR	Polished Chrome
	BN	Brushed Nickel
	MB	Matte Black
	BB	Brushed Brass

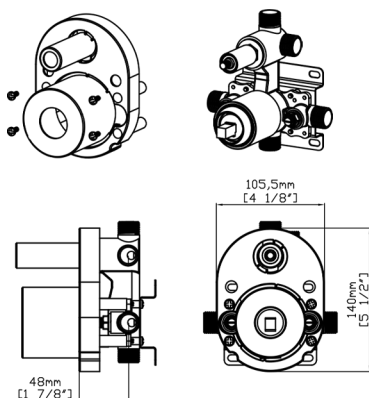

## Codes & Standards

- Canadian Uniform Plumbing Code™ (cUPC) 
- ASME A112.18.1-2018/CSA B125.1-18 